



Submit a current API650 inspection report detailing the tank's verticality and roundness with the information below.

Tank Owner: Location: Date:

Tank Number: Tank Ø: m Tank Height: m



Product height when measuring "R": mm Product Stored:

Measure Rim Space ("R") at 8 places (every 45°), starting at the Gauge Pole (0°)

at 0°, "R"= mm	at 45°, "R"= mm	at 90°, "R"= mm	at 135°, "R"= mm
at 180°, "R"= mm	at 225°, "R"= mm	at 270°, "R"= mm	at 315°, "R"= mm

Floating Roof Type Calculated Average Rim Space= mm

PLEASE SELECT PONTOON RIM TYPE

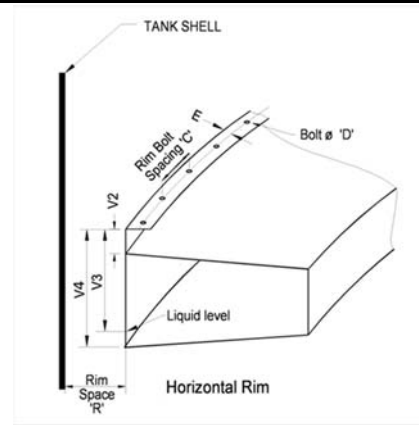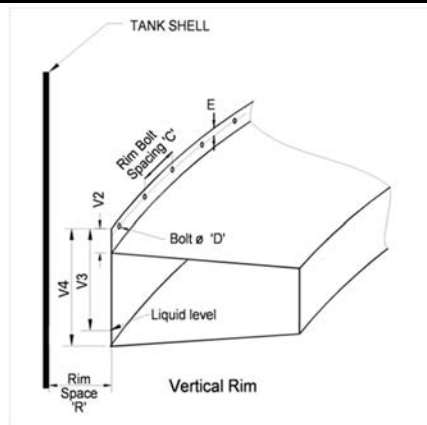

Rim Height above Pontoon "V2": mm
Top of Rim to Liquid Level "V3": mm
Rim Bolt Edge Distance "E": mm

Rim Depth "V4": mm
Rim Bolt Ø "D": mm
Rim Bolt Spacing "C": mm

PLEASE SELECT SEAL TYPE

Primary Seal Type:
Primary Seal Material:
Primary Fabric Material:
Secondary Seal Type:
Secondary Seal Material:
Secondary Fabric Material:
Wiper Seal Type:
Wiper Material:
PLEASE SELECT FOAM DAM TYPE
*Foam Dam Options:

ADDITIONAL OPTIONS

Rim Clip Adaptor
(Requires no drilling on site)

Wax Scraper

Shoe Shunts

Fabric Supports

*API650 & NFPA11 REQUIRES FOAM DAM STEEL (MIN. 10 GAUGE)

COMMENTS